


Pipe Coupling model: FLEX GRIP

1. Available in S or L, short or long versions
2. Non-axially restrained pipe coupling
3. Allows slight misaligned pipe connection
4. Allows vibration in the pipeline and slight movement
5. Good for connecting Metal, PE, FRP, GRP, PVC pipe
6. 316 Stainless Steel Coupling with EPDM, NBR, VITON or SILICONE seal

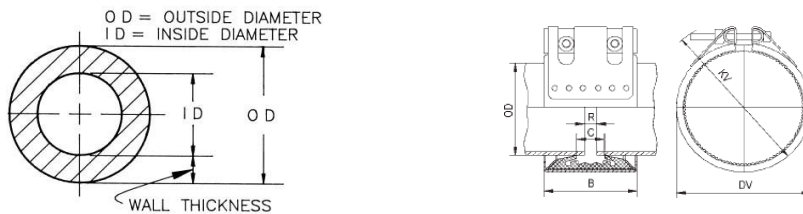

Higher Bar Pressures available

OD	Clamping Range	Short length	Long Length	Pipe Gap (R) Short	Pipe Gap (R) Long	Maximum Bolt Tightness	Pressure	Estimated weight
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(Nm)	Bar	(Kg)
21.3	19-23	57	72	5	10	10	32	0.35
26.7	24-28	57	72	5	10	10	32	0.4
33.4	31-35	57	100	5	10	10	32	0.45
42.2	40-44	57	100	5	15	15	32	0.5
48.3	46-50	57	100	5	15	15	32	0.55
60.3	54-64	80	139	5	15	30	32	1.2
73	71-75	80	139	5	30	30	32	1.3
88.9	87-91	107	203	5	30	30	28	2.7
114.3	112-116	107	203	5	30	50	28	3.4
141.3	139-143	116	203	5	30	50	28	4.8
168.3	166-170	116	203	5	40	80	24	5.8

Flex Grip 2 model available in sizes up to 4000.0mm
 Any OD size can be manufactured

