
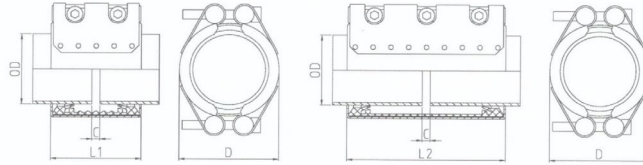


Pipe Coupling model: FLEX GRIP 2P

2 Part Casing Design, Opens into 2 halves

1. Available in S - short length, or L - long length models
2. Non-axially restrained Pipe Coupling, and can also be used as a Pipe Repair Clamp.
3. Allows slight misaligned pipe connection, increased tolerance when installing
4. Allows vibration in the pipeline and slight movement, increased sealing strength
5. Good for connecting Metal, PE, FRP, GRP, PVC and rubber lined pipes
6. 304 Stainless Steel Casing with EPDM, NBR, VITON or SILICONE seal options



2P - HIGH PRESSURE MODEL

OD	Pipe OD Range	Short length	Long Length	Pipe Gap (R) Short	Pipe Gap (R) Long	Maximum Bolt Tightness	Pressure	Estimated weight
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(Nm)	Bar	(Kg)
42.4	42-44	57	100	5	15	15	40	1
48.3	47-49	57	100	5	15	15	40	2
60.3	59-62	80	139	5	15	30	40	2
73.0	72-74	80	139	5	30	30	40	2
88.9	88-92	107	203	5	30	30	40	4
114.3	112-116	107	203	5	30	50	40	5
168.3	166-170	111	203	5	30	50	40	6
219.1	216-222	150	250	30	60	55	30	9
273.1	270-277	150	250	30	60	55	25	12
323.9	322-329	150	250	30	60	85	25	15
406.4	402-411	150	250	30	60	85	25	20
457.2	453-462	150	250	30	60	100	25	22
508.0	504-513	150	250	30	60	100	18	25
558.0	554-564	150	250	30	60	100	18	27
609.6	605-615	150	250	30	60	100	16	30

Any OD size can be manufactured up to 1016.0mm OD

www.orbitcouplings.com.au



The Flex Grip 2P model, is manufactured from a thicker casing, to achieve a higher pressure rating